

SEAMLESS BELTS
TECHNICAL DATA SHEET
CODE MN275

TYPE
MF L-351 G
BELT STRUCTURE
Outer cover

| | |
|-------------------------|------------------------------|
| Material | Natural elastomer |
| Cover finish | Ground surface |
| Colour | Raspberry |
| Hardness | 35 ±5 Sh.A |
| Coefficient of friction | - Paper 2.2 - Plastic 2.4 |

Traction core

| | |
|----------|-----------------|
| Material | Polyester (PET) |
|----------|-----------------|

Inner cover

| | |
|----------|---------------------|
| Material | Synthetic elastomer |
| Colour | Green |
| Hardness | 65 ±5 Sh.A |

TECHNICAL SPECIFICATIONS

| | | |
|---|--------------------|----------------|
| Available range of standard thicknesses (1) | from 6.0 to 8.0 mm | “ 0.2 “ 0.3 in |
|---|--------------------|----------------|

(1) Please contact CHIORINO S.p.A. for special requirements.

| | |
|----------------|----------------------|
| Diameter sizes | As per mandrels list |
|----------------|----------------------|

| | | |
|---------------|---------|-----------|
| Elongation 1% | 10 N/mm | 57 lbs/in |
|---------------|---------|-----------|

| | |
|---|-----|
| Permanent antistatic dynamically (UNI EN 21179) | yes |
|---|-----|

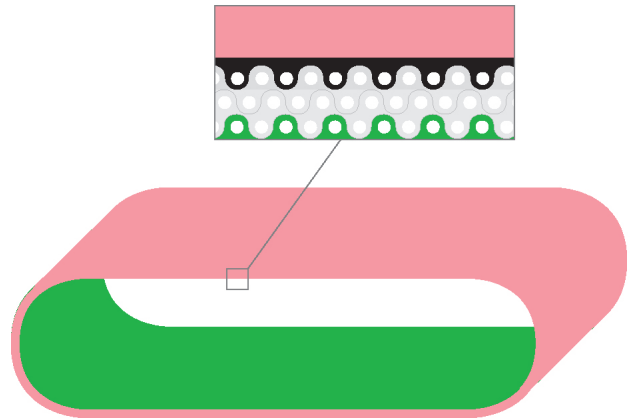
| | |
|-----------------|----------------------------------|
| Pulley diameter | According to the total thickness |
|-----------------|----------------------------------|

| | | | |
|----------------------------|------|--------|--------|
| Temperature resistance (2) | min. | -20 °C | -4 °F |
| | max | +70 °C | 158 °F |

(2) Use of a mandrel made belt with limit values may reduce its life.

SUITABLE FOR

Box folding industry: feeding


FEATURES

- Resistance to heat
- Coefficient of friction stable in time

CHEMICAL RESISTANCES

Class: 8 [link](#)

COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments

NOTES

Suitable for smooth cardboard, either glossy or matt.

No joint: manufactured with endless technology which guarantees endless uniformity of the surface and the coefficient of friction.

Issue: 29-01-2008

Last Update: 28-10-2013

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.