

### **SEAMLESS BELTS**

### **TECHNICAL DATA SHEET**

# CODE MN390 TYPE MF HS W-351 G

#### BELT STRUCTURE

#### Outer cover

Material Natural elastomer

Cover finish Ground surface

Colour White

Hardness 40 ±5 Sh.A

Coefficient of friction - Plastic 2.0

#### **Traction core**

Material Polyester (PET)

#### Inner cover

Material Synthetic elastomer

Colour Green

Hardness 65 ±5 Sh.A

### TECHNICAL SPECIFICATIONS

Available range of from 8.1 to 10.0 mm standard thicknesses (1) " 0.3 " 0.4 in

(1) Please contact CHIORINO S.p.A. for special requirements.

Diameter sizes

As per mandrels list

Elongation 1%

10 N/mm

57 lbs/in

Permanent antistatic dynamically (UNI EN 21179)

Pulley diameter

According to the total thickness


Temperature resistance (2)

min. -20 °C -4 °F
max +100°C 212 °F

(2) Use of a mandrel made belt with limit values may reduce its life.

## SUITABLE FOR

Box folding industry: feeding

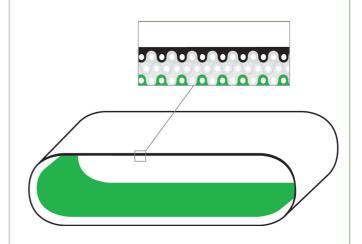

#### FEATURES

- Resistance to abrasion
- Coefficient of friction stable in time
- Excellent traction capability

#### CHEMICAL RESISTANCES

Class: 8 link

# COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments

### NOTES

For very abrasive and heavy cardboard and for high speed folder-gluers.

No joint: manufactured with endless technology which guarantees endless uniformity of the surface and of the coefficient of friction.

Issue: 10-01-2012 Last Update: 28-10-2013

#### DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.