

## NG5/A

### STRUCTURE

#### External covering

Material Natural elastomer

Surface pattern Pimpled


Special execution ---

Colour Sand

Hardness 50 ±5 Sh.A

#### Textile carcass

Material Polyester (PET)

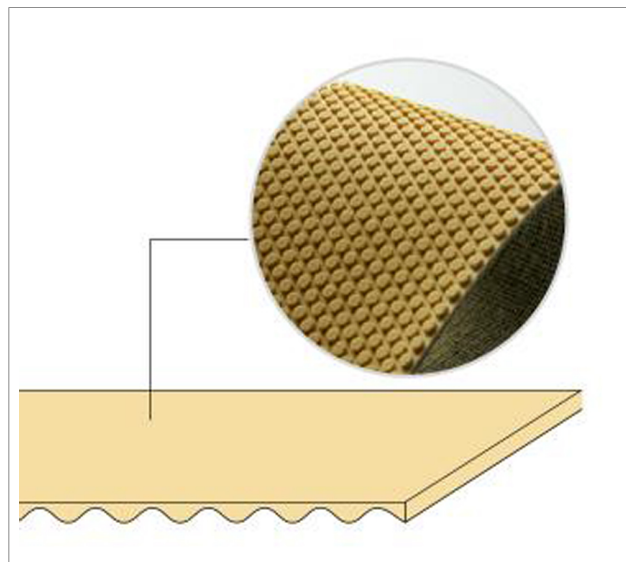

### TECHNICAL SPECIFICATIONS

|                            |                        |                 |
|----------------------------|------------------------|-----------------|
| Total thickness            | 1.9 mm                 | 0.07 in.        |
| Weight                     | 2.1 kg/m <sup>2</sup>  | 0.43 lbs./sq.ft |
| Tensile strength           | 60 N/mm                | 343 lbs./in.    |
| Temperature resistance (1) | min 0 °C<br>max 100 °C | 32 °F<br>212 °F |

(1) Use of the roller covering with limit values may reduce its life

### ROLL SIZES

|           |       |          |
|-----------|-------|----------|
| Length    | 100 m | 3937 in. |
| Width (2) | 50 mm | 2 in.    |
|           | 70 mm | 3 in.    |

(2) Other widths upon request

### SUITABLE FOR

Textile: wet fabrics finishing

### ADHESIVES

### FEATURES

- Excellent adhesion

### COMPLIANCES

REACH Regulation EC 1907/2006 and amendments

### NOTES

/A = self-adhesive version

#### DISCLAIMER

The information contained in this document describes the features of the Chiorino product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the Chiorino product. Chiorino cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.