

| | | | |
|------|-------|------|-----|
| CODE | TX-14 | TYPE | NG5 |
|------|-------|------|-----|

STRUCTURE

External covering

| | |
|-------------------|-------------------|
| Material | Natural elastomer |
| Surface pattern | |
| Special execution | --- |
| Colour | Sand |
| Hardness | 50 Sh.A |

Textile carcass

| | |
|----------|-----------------|
| Material | Polyester (PET) |
|----------|-----------------|

TECHNICAL SPECIFICATIONS

| | | |
|----------------------------|------------------------|-----------------|
| Total thickness | 1.9 mm | 0.07 in. |
| Weight | 2.1 kg/m ² | 0.43 lbs./sq.ft |
| Tensile strength | 60 N/mm | 343 lbs./in. |
| Temperature resistance (1) | min 0 °C max 100 °C | 32 °F 212 °F |

(1) Use of the roller covering with limit values may reduce its life


ROLL SIZES

| | | |
|-----------|-------|----------|
| Length | 100 m | 3937 in. |
| Width (2) | 50 mm | 2 in. |
| | 70 mm | 3 in. |

(2) Other widths upon request

SUITABLE FOR

Textile: wet fabrics finishing

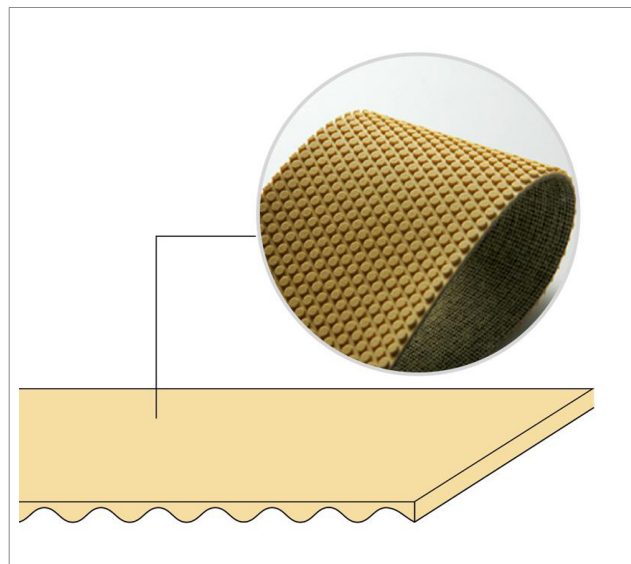

ADHESIVES

- To glue the covering to the roller it is recommendable to use the single-component cement TEXCOL CHIORINO

FEATURES

- Excellent adhesion
- Limited resistance to oils

COMPLIANCES

REACH Regulation EC 1907/2006 and amendments

NOTES

Self-adhesive/A version available

Issue: 26-09-2006

Last Update: 2-1-2018

DISCLAIMER

The information contained in this document describes the features of the Chiorino product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the Chiorino product. Chiorino cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.